



RP Series
With 3" integrated thermal printer




AP Series
With 12" / 15" / 15.6" LED LCD

AP/RP Series

Android POS

Low expense and no OS cost, save your budget twice. Absolute solution for retail and hospitality !

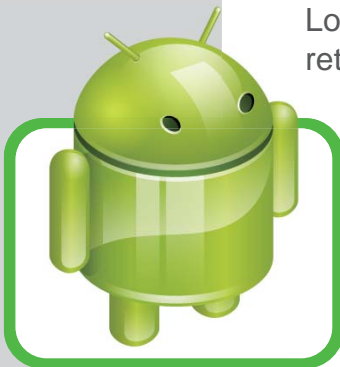

Android 4.2



2nd LCD creates interactive display



Zero cost for operation system



12" or 15" LED LCD resistive or 15" capacitive touch monitor



WiFi and Bluetooth optional



Low power consumption



Fanless solution / Easy maintenance



Specification

Model Name	AP-2000	AP-2050	AP-2060	RP-2340	RP-2360
Main board	i.MX6DL				
CPU	Dual Core 1GHz		Quad Core 1.0/1.2 GHz	Dual Core 1GHz	
Main Memory	1G (2GB / 4GB optional)				
OS Storage	16GB (32GB optional)				
Display Size	12" / 15" / 15.6" TFT LED-LCD with touch panel				
Display Resolution	1366 x 768	1024 x 768	1366 x 768		1024 x 768
Touch Panel	5 Wire Resistive Touch (True Flat / Capacitive Touch optional)				
OS Support	Android 4.2		Android 4.2.2	Android 4.2	
Power	AC 100V~240V / DC12V5A			AC 100V~240V / DC24V2.5A	
External I/O Interface					
Serial Port	2 x DB9 (4 Wire COM Port) 1 x RJ45 (4 Wire COM Port)			2 x DB9 (4 Wire COM Port) 1 x RJ45 (Used by Printer)	
Cash Drawer	1 X RJ11 Connector 12V (Default) / 24V				
VGA Port	1 x HDMI / 1 x VGA (Optional)				
I/O Port	1 x Micro SD Slot				
Speaker	2 x 1W Internal Speakers				
LAN	10 / 100 / 1000 bps				
USB Port	4 x USB 2.0 Type A , 1 x Micro USB(OTG)				
Power Button	1 x Power on / off switch				
Printer Feature					
Printing Method	-			Thermal Line Printing	
Density	-			203 dpi	
Paper Width	-			80 mm	
Maximum Print Speed	-			200 mm/s	
Paper Loading Type	-			Easy Loading	
Optional Peripheral					
Magnetic Card Reader	ISO 7811 option 1 / 2 / 3 track				
Finger Print	512dpi x 8bit gray scale, Capture area: 14.6 x 18.1 mm				
i-button	Dallas Key				
Wireless LAN	802.11 a / b / g / n				
Customer Display	VFD / LCD customer display				
Environment					
EMC & Safety	CE / FCC Class A				
Operating Temperature	5°C ~ 40°C				
Storage Temperature	-20°C ~ 60°C				
Operating Humidity	15%~80% RH				
Storage Humidity	20% ~90% RH				
Mechanical					
Housing Color	Black				
Dimension (W x D x H)	303 x 242 x 264 mm	352 x 235 x 320 mm	352 x 235 x 320 mm	303 x 240 x 345 mm	352 x 232 x 395 mm
Weight (N.W)	3.3 kg	5.6 kg	5.6 kg	4.2 Kg	6.5 Kg

• Product specification is subject to change without prior notice.

POS Accessories



Authorized Distributor/Reseller

Appostar

